

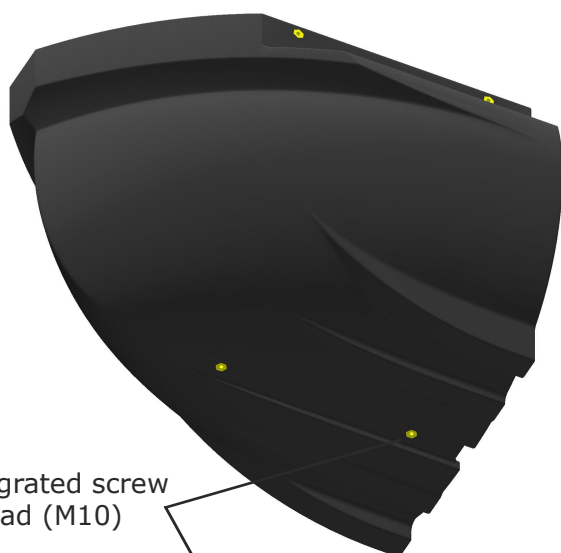


# PEREBO float system PT06 TOP

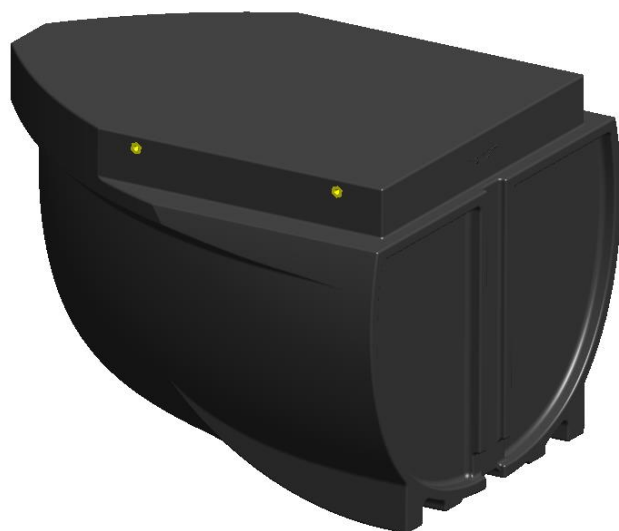

integrated screw thread (M10)

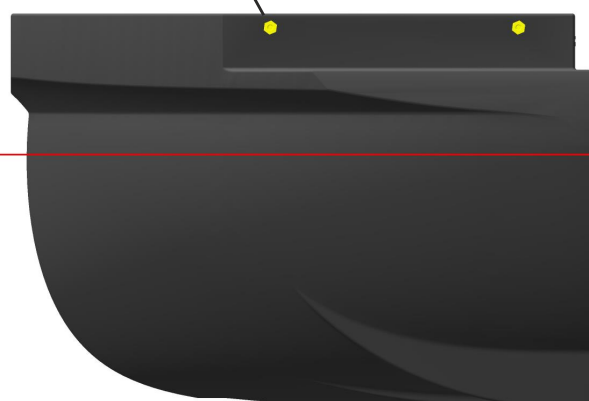


45cm immersion depth


technical data	
dimensions LW/H:	103,0 / 90,0 / 70,0cm
wall thickness :	approx. 8mm
self-weight:	approx. 27kg
material:	polyethylene
screw threads M10:	6x (4 lateral, 2 below )
standard color:	black
(other colors on request)	

load capacity (approx. values)	
immersion depth [cm]	load capacity [kg]
5,0	-11,0
10,0	3,0
15,0	25,0
20,0	50,0
25,0	78,0
30,0	107,0
35,0	138,0
<b>40,0</b>	<b>169,0</b>
<b>45,0</b>	<b>202,0</b>
50,0	234,0
(self-weight deducted)	
max. recommended immersion depth= 40-45cm	

side view

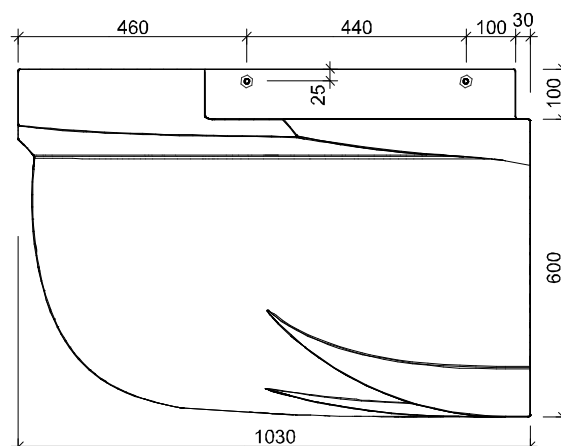

front view

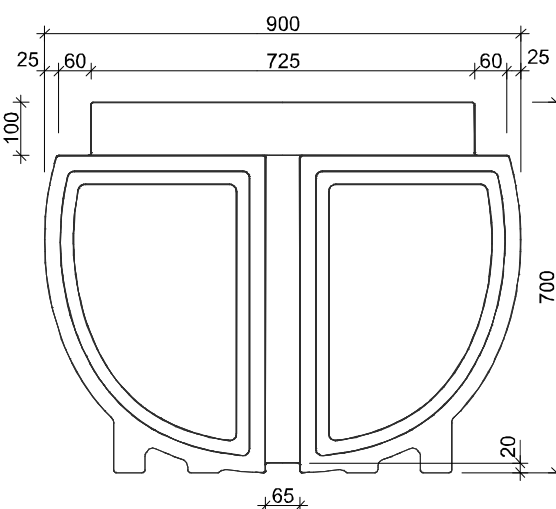

**Important note:**

Please note that it may come to dimensional deviations as a result of production and at different outside temperatures.